

Easy Portability | Friendly Storage | Free Share



## VDS Series

PC Oscilloscope

- Up to 100MHz bandwidth, and max 1GSa/s real-time sample rate /
- 10M record length /
- Friendly UI : FFT, or X-Y, and waveform 2 views displayed on the same screen /
- Multi-trigger option : edge, video, slope, pulse and alternate /
- USB bus powering, and LAN remote control (optional) /
- Ultra-thin body design, easy portability /


Ultra-thin body design, easy portability



- 1. Rs232 port (optional)
- 2. USB port : power supplying via USB bus, communicating with PC
- 3. LAN port (optional) : remote control
- 4. Channel 1 signal input
- 5. Channel 2 signal input
- 6. EXT trigger input, trigger output, or Pass/Fail output
- 7. probe compensation : measurement signal (3.3V/1KHz) output


**Note :** When communicating with PC via LAN, the oscilloscope should be powered by adapter.

record length up to 10M

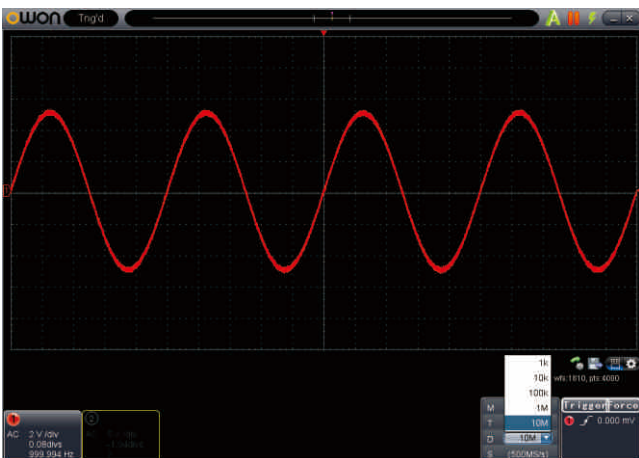


various record length option, max 10M

multi-trigger option

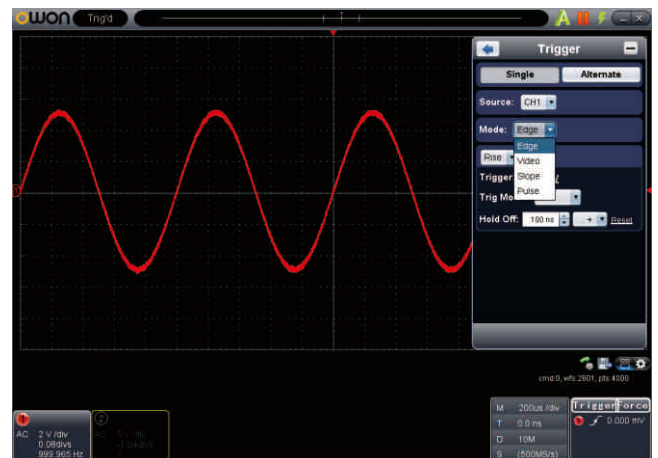


Edge, Video, Slope, Pulse, and Alternate

**X-Y mode, FFT mode with waveform displayed on the same screen**

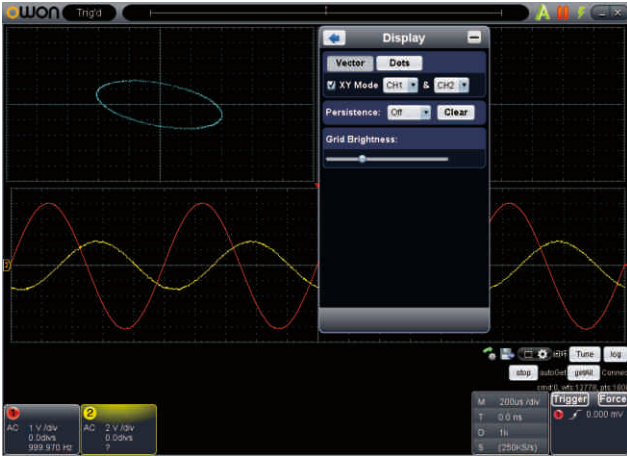

X-Y mode with waveform display

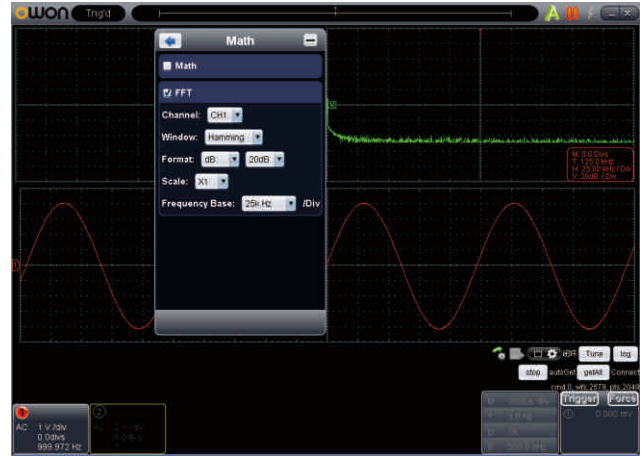

FFT mode with waveform display

**Performance Specifications**


Model	VDS1022I	VDS1022	VDS2062	VDS3102	VDS3104
Bandwidth	25MHz		60MHz	100MHz	
Channel	2+1 (multi)				4+1 (multi)
Sample Rate	100MS/s		500MS/s	1GS/s	
Horizontal Scale (s/div)	5ns/div - 100s/div, step by 1 - 2 - 5		2ns/div - 100s/div, step by 1 - 2 - 5		
Rise Time	≤14ns		≤5.8ns	≤3.5ns	
Record Length	5K		10M		
Input Coupling	DC, AC, GND				
Input Impedance	1MΩ ± 2%, in parallel with 10pF ± 5pF				
Channels Isolation	50Hz : 100 : 1 ; 10MHz : 40 : 1				
Max Input Voltage	400V (PK - PK) (DC + AC, PK - PK)		40V (PK - PK) (DC + AC, PK - PK)		
DC Gain Accuracy	±3%				
DC Accuracy	Average ≥16 : ±(3% reading + 0.05 div) for ΔT				
Probe Attenuation Factor	1X, 10X, 100X, 1000X				
LF Respond (AC, -3dB)	≥5Hz (at input, AC coupling, -3dB)				
Sampling Rate / Relay Time Accuracy	150ps				
Interpolation	sin(x)/x				
Interval (ΔT) Accuracy (full bandwidth)	Single : ± (1 interval time + 100ppm × reading + 0.6ns), Average > 16 : ±(1 interval time + 100ppm × reading + 0.4ns)				
Vertical Resolution (A/D)	8 bits resolution (2 channels simultaneously)				
Vertical Sensitivity	5mV/div - 5V/div				

## Performance Specifications

Model	VDS1022I	VDS1022	VDS2062	VDS3102	VDS3104
Trigger Type	Edge, Pulse, Video, Slope, Alternate				
Trigger Mode	Auto, Normal, Single				
Trigger Level	±5 divisions from screen center				
Acquisition Mode	Sample, Peak Detect, and Average				
Line / Field Frequency (video)	NTSC, PAL, and SECAM standard				
Cursor Measurement	ΔV, and ΔT between cursors				
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B $\overline{\downarrow}$ , Delay A→B $\overline{\uparrow}$ , +Width, -Width, +Duty, -Duty				
Waveform Math	+, -, ×, ÷, invert, FFT				
Lissajous Figure	Bandwidth	full bandwidth			
	Phase Difference	±3 degrees			
Communication Interface	USB1.1 (isolation)	USB1.1	USB2.0, LAN (optional)		
Multi-function Interface	Signal Type	synchronized input / output, Pass / Fail, external trigger input			
	Level Standard	TTL			
Power Supply	5.0V/1A				
Power Consumption	/		≤5W	≤8W	
Dimensions (W × H × D)	170 × 120 × 18 (mm)		190 × 120 × 18 (mm)		
Weight (without package)	About 0.26 kg			About 0.3 kg	

Specifications subject to change without prior notice.

The accessories subject to final delivery.

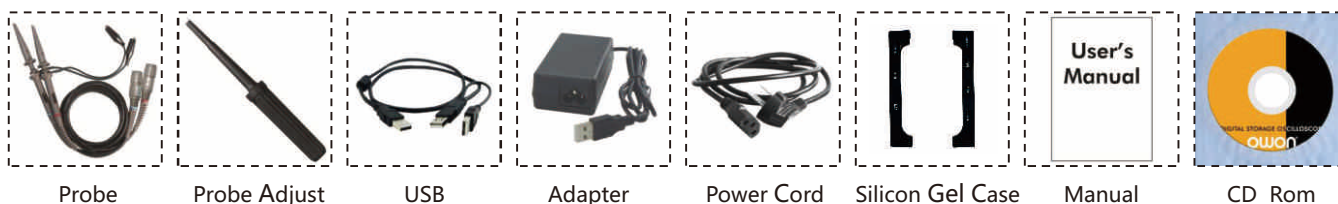

Probe

Probe Adjust

USB

Adapter

Power Cord

Silicon Gel Case

Manual

CD Rom

PS: \* Power cord and adapter only available for models with LAN port.

**LILLIPUT®**

E-mail : [info@owon.com.hk](mailto:info@owon.com.hk)

[WWW.OWON.COM.HK](http://WWW.OWON.COM.HK)

**Fujian Lilliput Optoelectronics Technology Co., Ltd.**

The Mansion of Optoelectronics, Hengsan Road  
Lantian Industrial Zone, Zhangzhou 363005 China

Tel : +86.596.213.0430 Fax : +86.596.210.9272

**Xiamen Lilliput Technology Co., Ltd.**

5/F, B Area, Chuangxin Plaza, Software Park  
Huandao Road, Xiamen 361005 China

Tel : +86.592.257.5666 Fax : +86.592.257.5669